

# Excess Flow Valve for Autogas Dispensing Systems 3272H

## Application

Especially designed for high flow/high differential dispensing systems. Can also be used for filling, liquid withdrawal, and vapor equalizing in container or line applications.



## Features

- Solid brass construction
- Stainless steel spring
- Meets UL requirements
- Highest flowing valve in the market



## Materials

Body ..... Brass  
 Spring ..... Stainless Steel  
 Seat ..... Brass



**3272H**

### Typical Installation

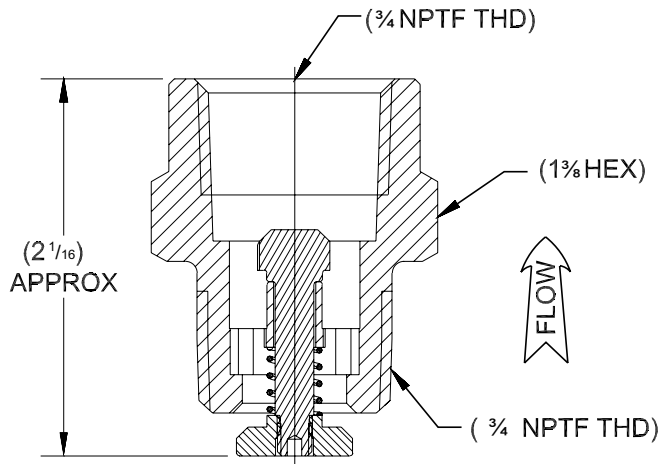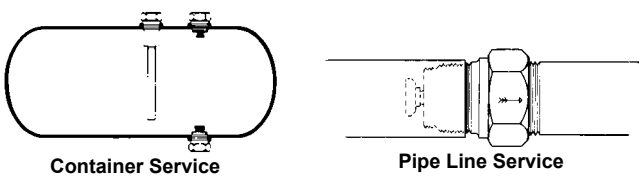

## Ordering Information

Part Number	Inlet Connection	Outlet Connection	Wrench Hex Flats	Effective Length (Approx.)	Liquid (GPM Propane)
3272H	3/4"	3/4"	1 3/8"	1 3/8"	29